

PRELIMINARY

L385-30K42

 stem type LED with unspherical lens

L385-30K42 is an InGaN LED mounted on TO-46 stem with unspherical glass lens, being designed for sensing devices.

On forward bias it emits a spectral band of radiation, which peaks at 385nm.


◆ Outer dimension (Unit:mm)

◆ Features

- 1) High Power
- 2) High Reliability

◆ Specifications

- 1) Product Name LED Lamp
- 2) Type No. L385-30K42
- 3) Chip Spec.
 - (1) Material InGaN
 - (2) Peak Wavelength 385nm
- 4) Package
 - (1) type TO-46 stem
 - (2) Lens Unspherical Glass Lens

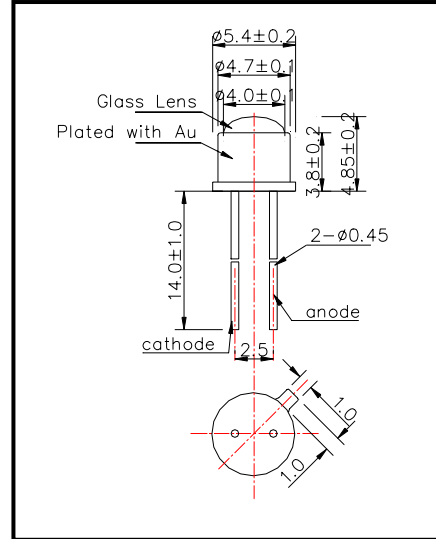

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	110	mW	T _a =25°C
Forward Current	I _F	30	mA	T _a =25°C
Pulse Forward Current	I _{FP}	50	mA	T _a =25°C
Reverse Voltage	V _R	3	V	T _a =25°C
Operating Temperature	T _{OPR}	-30 ~ +85	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	250	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 250°C

◆ Electro-Optical Characteristics

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =20mA		3.6	4.3	V
Reverse Current	I _R	V _R =3V			10	uA
Total Radiated Power	P _O	I _F =20mA	0.5	1.0		mW
Radiant Intensity	I _E	I _F =20mA	13	26		mW/sr
Peak Wavelength	λ _P	I _F =20mA	375	385	395	nm
Half Width	Δλ	I _F =20mA		17		nm
Viewing Half Angle	θ _{1/2}	I _F =20mA		±5		deg.

‡Radiated Power is measured by Ando Optical Multi Meter AQ2730 & AQ2741

‡Radiant Intensity is measured by Tektronix J-6512.